

RNAV STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO


TRANS ALT 5000ft
TRANS LEVEL by ATC

ATIS 124.525
TWR 118.6
DUBLIN ACC NORTH 129.175
DUBLIN ACC SOUTH 126.250

DUBLIN RWY 10

CAT A, B

LIFFY 4F, PESIT 4F, BEPAN 4F, OLONO 4F, INKUR 4F,
SUROX 4F, BAMLI 4F, NEVRI 4F, ROTEV 4F.

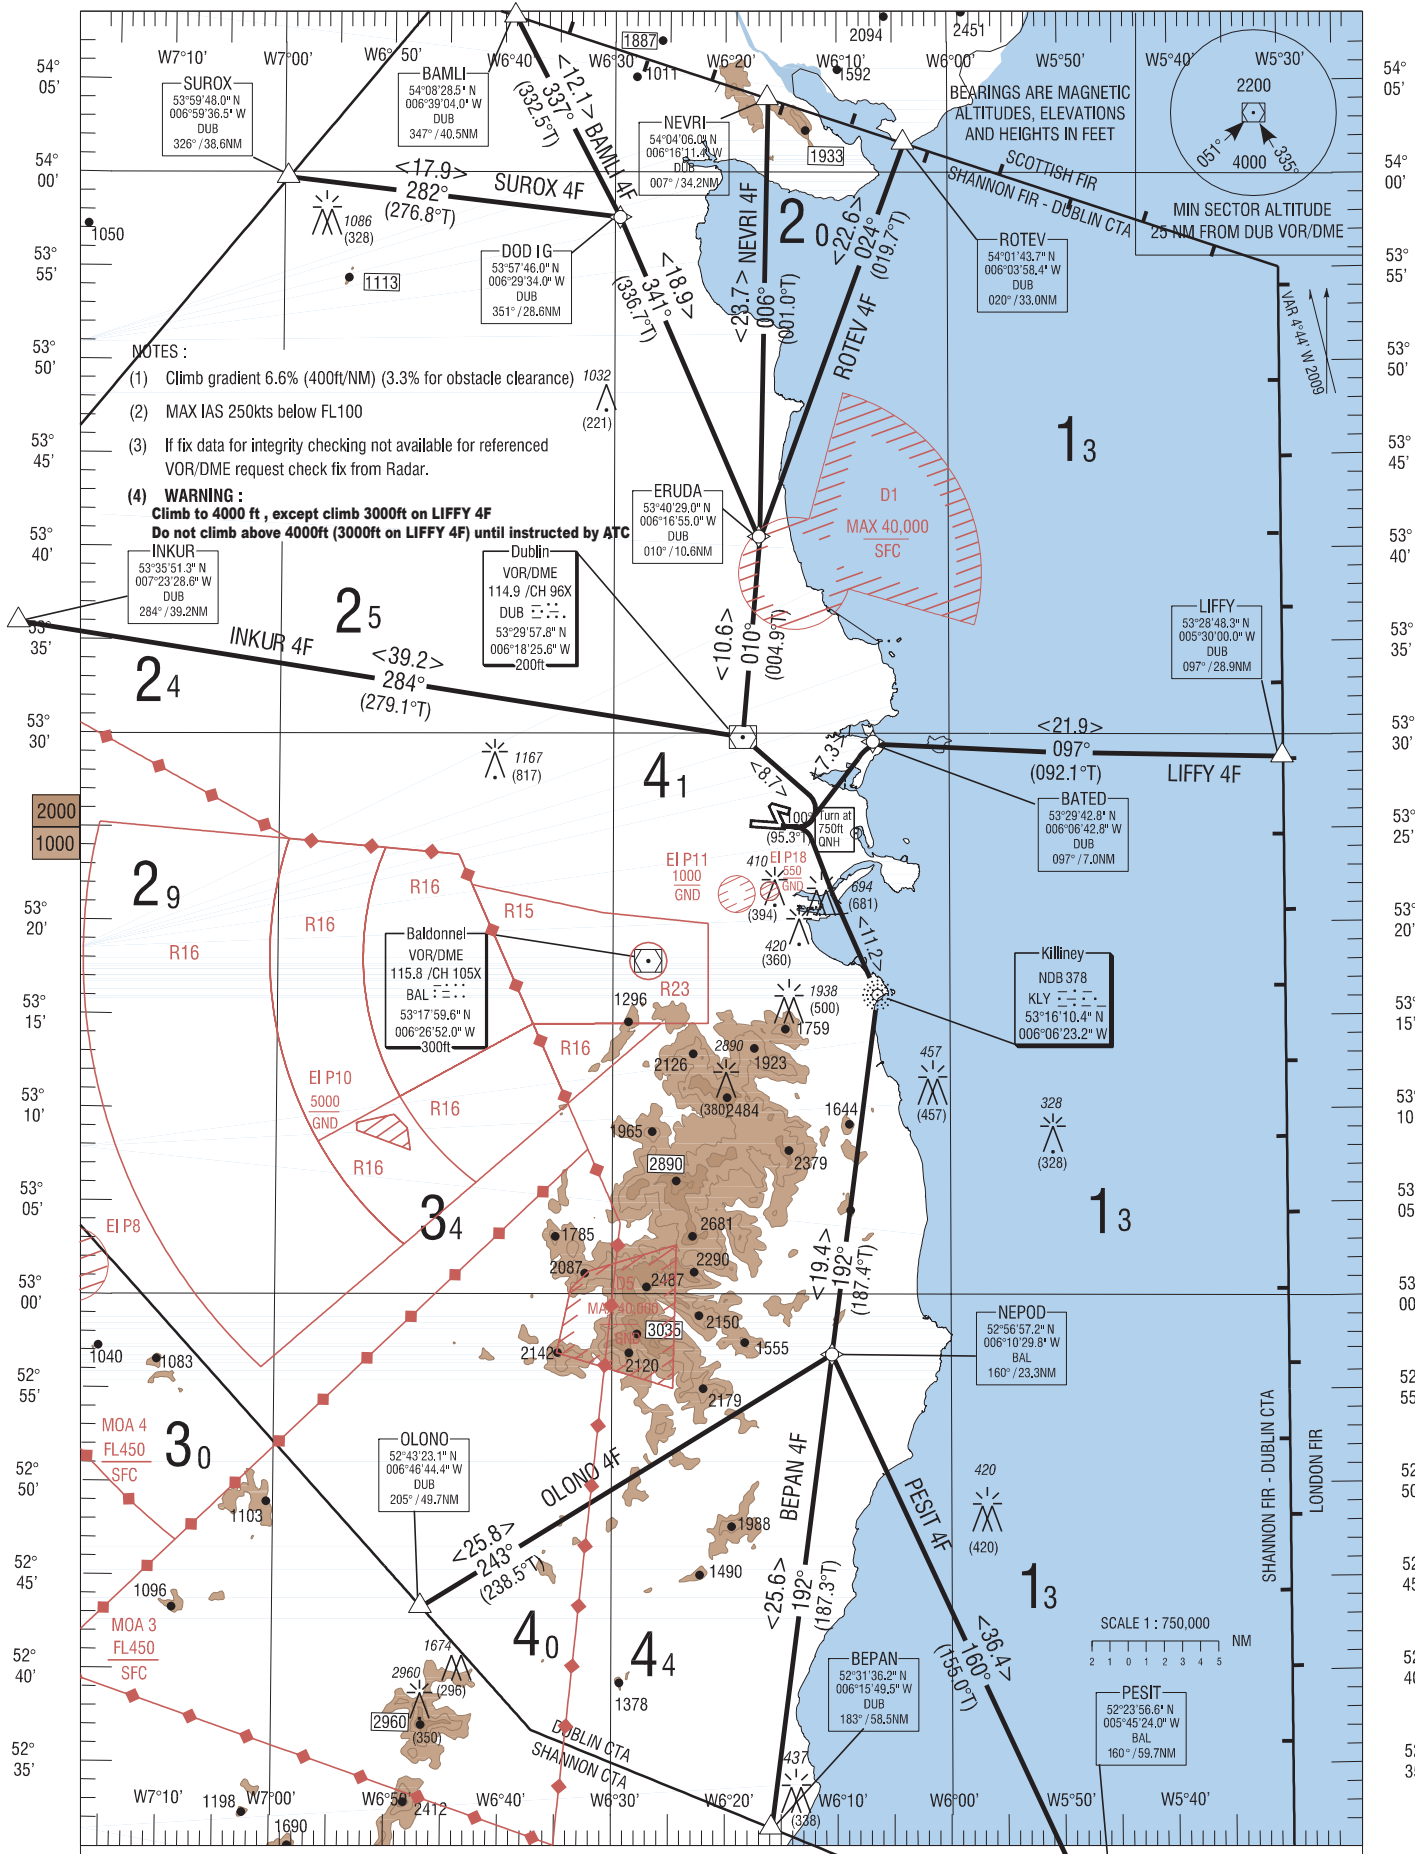

- NOTES:
- (1) Climb gradient 6.6% (400ft/NM) (3.3% for obstacle clearance)
 - (2) MAX IAS 250kts below FL100
 - (3) If fix data for integrity checking not available for referenced VOR/DME request check fix from Radar.
 - (4) **WARNING:**
Climb to 4000 ft, except climb 3000ft on LIFFY 4F
Do not climb above 4000ft (3000ft on LIFFY 4F) until instructed by ATC

CHANGE: New Chart

DUBLIN STANDARD INSTRUMENT DEPARTURE RWY 10
AIRCRAFT CATEGORIES A AND B

BAMLI4F SID RWY10

Path Terminator	Waypoint Name	Fly Over	Course °M (°T)	Turn Direction	Altitude	Speed Limit (Kt)	Mag Variation	Navigation Performance
CA	RWY10	-	100 (095.3)	-	+750	-	+ 4.7	P-RNAV
DF	DUB	-	-	L	-	-	+ 4.7	P-RNAV
TF	ERUDA	-	010 (004.9)	-	-	-	+ 4.7	P-RNAV
TF	DODIG	-	341 (336.7)	-	-	-	+ 4.7	P-RNAV
TF	BAMLI	-	337 (332.5)	-	-	-	+ 4.7	P-RNAV

BEPAN4F SID RWY10

Path Terminator	Waypoint Name	Fly Over	Course °M (°T)	Turn Direction	Altitude	Speed Limit (Kt)	Mag Variation	Navigation Performance
CA	RWY10	-	100 (095.3)	-	+750	-	+ 4.7	P-RNAV
DF	KLY	-	-	R	-	-	+ 4.7	P-RNAV
TF	NEPOD	-	192 (187.4)	-	-	-	+ 4.7	P-RNAV
TF	BEPAN	-	192 (187.3)	-	-	-	+ 4.7	P-RNAV

INKUR4F SID RWY10

Path Terminator	Waypoint Name	Fly Over	Course °M (°T)	Turn Direction	Altitude	Speed Limit (Kt)	Mag Variation	Navigation Performance
CA	RWY10	-	100 (095.3)	-	+750	-	+ 4.7	P-RNAV
DF	DUB	-	-	L	-	-	+ 4.7	P-RNAV
TF	INKUR	-	284 (279.1)	-	-	-	+ 4.7	P-RNAV

LIFFY4F SID RWY10

Path Terminator	Waypoint Name	Fly Over	Course °M (°T)	Turn Direction	Altitude	Speed Limit (Kt)	Mag Variation	Navigation Performance
CA	RWY10	-	100 (095.3)	-	+750	-	+ 4.7	P-RNAV
DF	BATED	-	-	L	-	-	+ 4.7	P-RNAV
TF	LIFFY	-	097 (092.1)	-	-	-	+ 4.7	P-RNAV

NEVRI4F SID RWY10

Path Terminator	Waypoint Name	Fly Over	Course °M (°T)	Turn Direction	Altitude	Speed Limit (Kt)	Mag Variation	Navigation Performance
CA	RWY10	-	100 (095.3)	-	+750	-	+ 4.7	P-RNAV
DF	DUB	-	-	L	-	-	+ 4.7	P-RNAV
TF	ERUDA	-	010 (004.9)	-	-	-	+ 4.7	P-RNAV
TF	NEVRI	-	006 (001.0)	-	-	-	+ 4.7	P-RNAV

OLONO4F SID RWY10

Path Terminator	Waypoint Name	Fly Over	Course °M (°T)	Turn Direction	Altitude	Speed Limit (Kt)	Mag Variation	Navigation Performance
CA	RWY10	-	100 (095.3)	-	+750	-	+ 4.7	P-RNAV
DF	KLY	-	-	R	-	-	+ 4.7	P-RNAV
TF	NEPOD	-	192 (187.4)	-	-	-	+ 4.7	P-RNAV
TF	OLONO	-	243 (238.5)	-	-	-	+ 4.7	P-RNAV

PESIT4F SID RWY10

Path Terminator	Waypoint Name	Fly Over	Course °M (°T)	Turn Direction	Altitude	Speed Limit (Kt)	Mag Variation	Navigation Performance
CA	RWY10	-	100 (095.3)	-	+750	-	+ 4.7	P-RNAV
DF	KLY	-	-	R	-	-	+ 4.7	P-RNAV
TF	NEPOD	-	192 (187.4)	-	-	-	+ 4.7	P-RNAV
TF	PESIT	-	160 (155.0)	-	-	-	+ 4.7	P-RNAV

ROTEV4F SID RWY10

Path Terminator	Waypoint Name	Fly Over	Course °M (°T)	Turn Direction	Altitude	Speed Limit (Kt)	Mag Variation	Navigation Performance
CA	RWY10	-	100 (095.3)	-	+750	-	+ 4.7	P-RNAV
DF	DUB	-	-	L	-	-	+ 4.7	P-RNAV
TF	ERUDA	-	010 (004.9)	-	-	-	+ 4.7	P-RNAV
TF	ROTEV	-	024 (019.7)	-	-	-	+ 4.7	P-RNAV

SUROX4F SID RWY10

Path Terminator	Waypoint Name	Fly Over	Course °M (°T)	Turn Direction	Altitude	Speed Limit (Kt)	Mag Variation	Navigation Performance
CA	RWY10	-	100 (095.3)	-	+750	-	+ 4.7	P-RNAV
DF	DUB	-	-	L	-	-	+ 4.7	P-RNAV
TF	ERUDA	-	010 (004.9)	-	-	-	+ 4.7	P-RNAV
TF	DODIG	-	341 (336.7)	-	-	-	+ 4.7	P-RNAV
TF	SUROX	-	282 (276.8)	-	-	-	+ 4.7	P-RNAV